

SFP Copper Transceiver




Features

- ▶ Up to 1.25 Gb/s bi-directional data links
- ▶ Hot-pluggable SFP footprint
- ▶ Low power dissipation(1.05W typical)
- ▶ Compact RJ-45 connector assembly
- ▶ Fully metal enclosure, for lower EMI
- ▶ ROHS compliant and (lead-free)
- ▶ Single +3.3V power supply
- ▶ 1.25 Gigabit Ethernet over cat 5 cable
- ▶ Commercial case temperature range: 0°C to 70°C

Product Information

Model No.	Data Rate	Distance	Temp.(°C)	Interface
ES-T1-R	1000M only	100M	0~70	RJ45
ES-T2-R	10/100/1000M	100M	0~70	RJ45
ES-T3-R	10/100M	100M	0~70	RJ45
ES-T4-R	1000M	100M	-40~+85	RJ45

Applications 24:

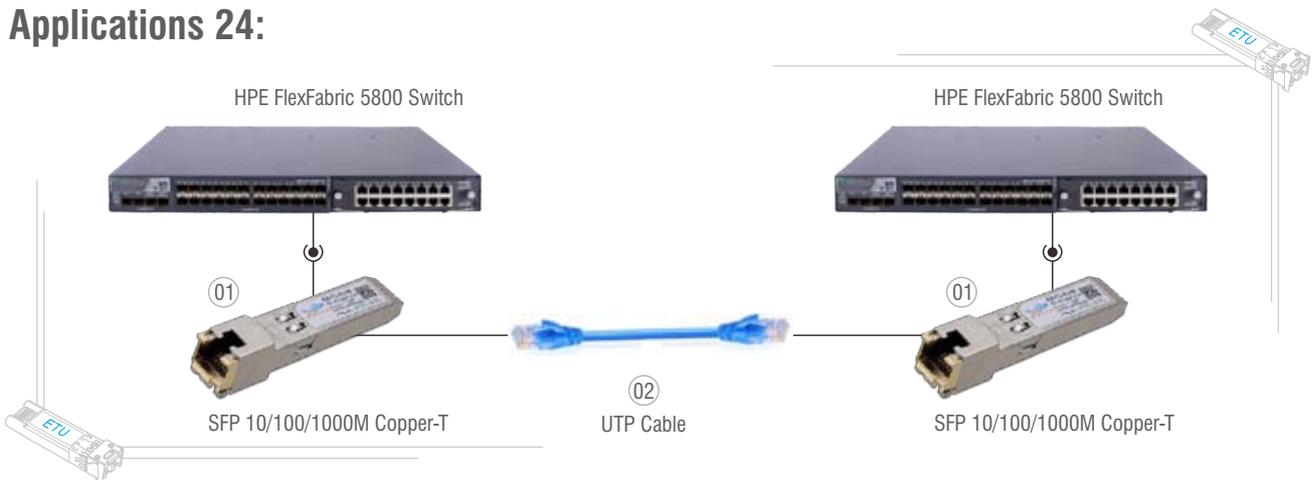

Item No.	ETU PN	Description
01	ES-T2-R	10/100/1000M SFP 100M Copper-T RJ45
02	UTP Cable	UTP Cable